



Guiding the Way

## TYPE MTW-SH


### CONTROL CABLE, SHIELDED

PVC Insulation

Mylar Aluminum Foil Shield w/Drain Wire

PVC Jacket

600 Volt, 90°C Dry/Wet

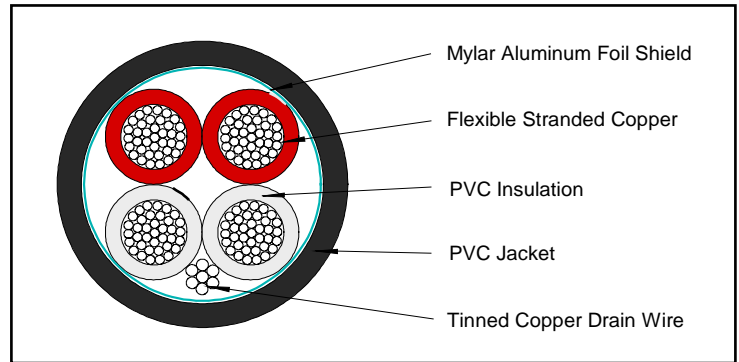

### APPLICATIONS:

Cable is suitable for wiring of machine tools, appliances and control circuits not exceeding 600 volts.

### CONSTRUCTION:

Flexible stranded copper conductors, PVC (Polyvinyl Chloride) insulated, color-coded as follows: red, red w/white stripe, white, and white w/black stripe; four conductors cabled together, mylar aluminum foil shield with a #16 AWG stranded tinned copper drain wire, sunlight-resistant black PVC jacket overall, surface printed.

### STANDARDS:

1. ASTM B-8, B-174.
2. UL 83.
3. Sunlight Resistant, Direct Burial.

BKON CAT NO.	NO. OF CDRS.	SIZE/ AWG.	STRANDS	JKT. THICK. mils	O.D. in.	WEIGHT lbs/mft
FCTD1RW-04	4	14	41	45	.500	130

Information on this sheet subject to change without notice.  
SHIPPING TOLERANCE +/- 10%